


YMCKH RIBBON



FOR NON PVC CARDS

The Evolis YMCKH ribbon has been designed to enable Evolis retransfer printers to use various card substrates other than PVC: Polycarbonate (PC), PET-G and ABS. The Heat Seal (H) panel is a special coating that is applied after the Y, M, C, K panels to enable the good transfer of the printing on the card with uneven surface.

This ribbon is composed by 6 panels: Yellow, Magenta, Cyan, Black and Heat Seal.

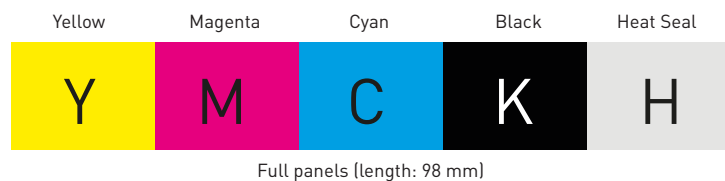

Product Information:

- Color ribbon
- 5 panels (Yellow, Magenta, Cyan, Black, Heat Seal)

ADVANTAGES

Capable of printing with a 600 dpi resolution, this ribbon can print images, text or micro-text in high definition.

Tested and validated by Evolis R&D and Quality departments, these consumables bring you printing quality and reliability.

GENERAL SPECIFICATIONS

Features:

- For single or dual-sided color printing
- Ribbon in PET with thin layer of specialized coatings.
- 5 whole panels 98mm length - Yellow, Magenta, Cyan, Black and Heat Seal
- Printing lifespan: up to 3 years
- Compatible with PVC, composite cards, PET-G polycarbonate cards, ABS
- For retransfer technology

Compatibility and capacity:

PART#	NUMBER OF PRINTS	AVANSIA
RT5F013NAA	400	•

ELECTRONIC KEY
Install the key before
the ribbon

Evolis electronic key with RFID tag:

Delivered with the ribbon, the electronic key secure the use of the printer and allow the ribbon recognition and monitoring. Without this key, the printer will not print.

Storage Information:

Up to 1 year after purchase, if stored in a cool, dry environment and having remained unopened from the original packaging. Storage temperature between 5-25°C (41-77° F) and at RH between 35-65%. Once opened, lifetime of 6 months, if stored under cool, dry conditions. Avoid dust and direct sunlight.